



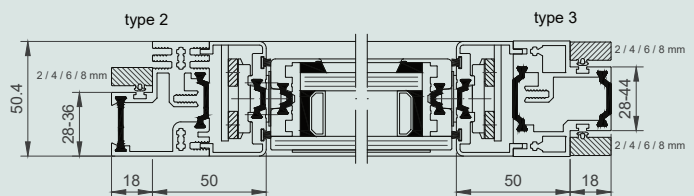

# S9-iVt-05 Allglass

Our top seller with flush Allglass surface

The HAHN Louvre Window S9-iVt-05 Allglass combines the outstanding features of the S9-iVt-05 in regard to ventilation, weather tightness and thermal protection with a clear flush Allglass look to outside of units for most harmonic integration into the facade design. Tested and certified for Natural ventilation (EN 14351-1), Smoke ventilation (EN 12101-2), Ball protection safety (DIN 18032-3).

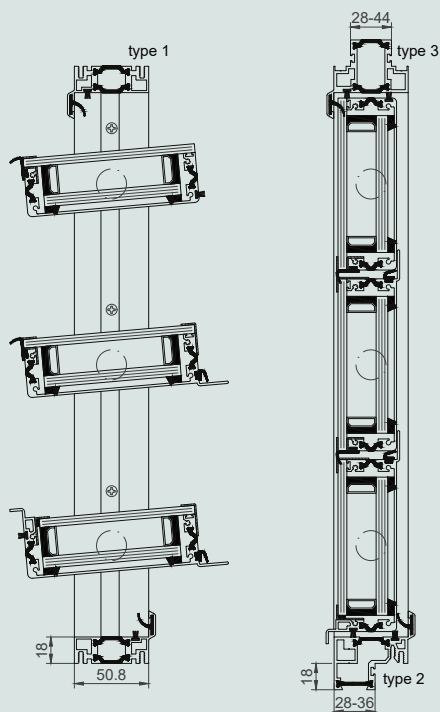

Frame width:  
Frame height:  
Frame types:

Blade height:  
Opening angle:  
Air permeability:  
Water tightness:  
Uw-value:

Min. 250 mm / Max. 1600 mm  
Min. 250 mm / Max. any  
Frame type 1: For brickwork, timber, metal constructions  
Frame type 2: For curtain wall  
Min. 200 mm / Max. 350 mm  
Max. 84°  
Class 3  
Class 4A  
Max. 1.7 W/m<sup>2</sup>K

